


PRODUCT SPECIFICATION



- 1. PRODUCT CODE** FMC45603MM
- 2. DESCRIPTION** 4 Core 56/.30 (4.0mmsq, 25amp). P.C.W. V90 P.V.C. Insulated and 5V90 P.V.C. Sheathed Flexible supply cable 250/440V to AS/NZS 3191. Ordinary Duty. Oxygen Free copper. RoHS compliant P.V.C.
- 3. CONSTRUCTION**
- 3.1 CONDUCTOR:** 56 strands of 0.30 mm nom. Plain Annealed Copper to AS/NZS 1125 drawn from Class 102 copper to AS/NZS 1574.
- Max. D.C. resistance at 20C: 5.0 ohms / km
- 3.2 INSULATION:** Coloured V90 P.V.C. to AS/NZS 3808.
- Nominal Diameter: 4.15 mm
Nominal Wall Thickness: 0.80 mm
- 3.3 LAY UP:** 4 Cores laid up.
1. Brown
 2. White
 3. Light Blue
 4. Light Green / Yellow
- 3.4 SHEATH:** Coloured P.V.C. type 5V90 to AS/NZS 3808.
- Nominal Diameter: 12.9 mm
Nominal Wall Thickness: 1.1 mm
- 3.5 IDENTIFICATION:** Indented into Sheath at intervals not exceeding 500mm.
- TYCAB 75c**
- METRE MARK

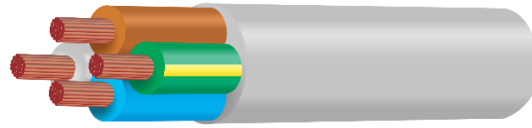