


## PRODUCT SPECIFICATION

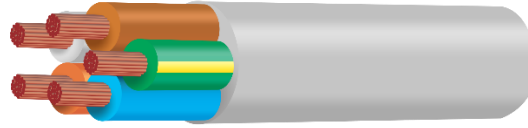

- 1. PRODUCT CODE:** FMC52402MM
- 2. DESCRIPTION** 5 Core 24/2 (0.75mmsq, 7.5 Amp). Plain Copper Wire.  
V90 PVC Insulated & 5V90 P.V.C. Sheathed Flexible cable.  
To AS/NZS 3191 250/440 Volt Ordinary Duty construction.  
Oxygen Free copper.  
RoHS compliant P.V.C.
- 3. CONSTRUCTION**
- 3.1 CONDUCTOR:** 24 strands of 0.2mm nom. Annealed Copper to AS/NZS 1125 drawn from Class 110 copper to AS/NZS 1574.
- Max. D.C. resistance at 20C: 26.07 ohms / km
- 3.2 INSULATION:** Coloured V90 P.V.C. to AS/NZS 3808.
- Nominal Diameter: 2.3 mm  
Nominal Wall Thickness: 0.6 mm
- 3.3 LAY UP:** 5 Cores laid up.
1. Light Blue
  2. Brown
  3. White
  4. Orange
  5. Green / Yellow
- 3.4 SHEATH:** Coloured P.V.C. type 5V90 to AS/NZS 3808.
- Nominal Diameter: 8.1 mm  
Nominal Wall Thickness: 0.9 mm
- 3.5 IDENTIFICATION:** Indented into Sheath at intervals not exceeding 500mm.

**TYCAB V90 250/440V ORD DUTY**

METRE MARK

