


PRODUCT SPECIFICATION



- 1. PRODUCT CODE:** FMC530025MM
- 2. DESCRIPTION** 5 Core 30/.25 (1.5mmsq, 15 Amp). Plain Copper Wire.
V90 PVC Insulated & 5V90 P.V.C. Sheathed Flexible cable.
250/440 Volt to AS/NZS 3191. Ordinary Duty.
Oxygen Free copper.
RoHS compliant P.V.C.
- 3. CONSTRUCTION**
- 3.1 CONDUCTOR:** 30 strands of 0.25 mm nom. Annealed Copper to AS/NZS 1125 drawn from Class 102 copper to AS/NZS1574.
- Max. D.C. resistance at 20C: 13.3 ohms / km
- 3.2 INSULATION:** Coloured V90 P.V.C. to AS/NZS 3808.
- Nominal Diameter: 2.95 mm
Nominal Wall Thickness: 0.7 mm
- 3.3 LAY UP:** 5 Cores laid up.
1. Light Blue
 2. Brown
 3. White
 4. Orange
 5. Green / Yellow
- 3.4 SHEATH:** Coloured P.V.C. type 5V90 to AS/NZS 3808.
- Nominal Diameter: 10.3 mm
Nominal Wall Thickness: 1.1 mm
- 3.5 IDENTIFICATION:** Indented into Sheath at intervals not exceeding 500mm.
- TYCAB 75c**
- METRE MARK

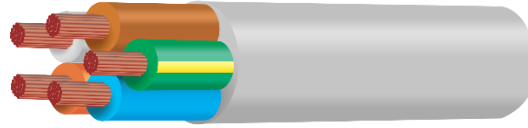