


PRODUCT SPECIFICATION

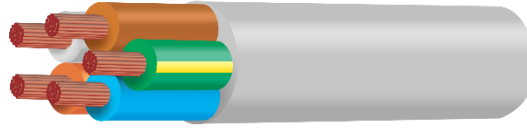

1. PRODUCT CODE FMC55603MM

2. DESCRIPTION 5 Core 56/.30 (4.0mmsq, 25amp). P.C.W.
V90 P.V.C. Insulated and 5V90 P.V.C. Sheathed Flexible cord.
250/440V to AS/NZS 3191. Ordinary Duty.
Oxygen Free copper.
RoHS compliant P.V.C.

3. CONSTRUCTION

3.1 CONDUCTOR: 56 strands of 0.30 mm nom. Plain Annealed Copper to
AS/NZS 1125 drawn from Class 102 copper to AS/NZS 1574.

Max. D.C. resistance at 20C: 5.0 ohms / km

3.2 INSULATION: Coloured V90 P.V.C. to AS/NZS 3808.

Nominal Diameter: 4.35 mm
Nominal Wall Thickness: 0.8 mm

3.3 LAY UP: 5 Cores laid up.
1. Light Blue
2. Brown
3. White
4. Orange
5. Light Green / Yellow

3.4 SHEATH: Coloured P.V.C. type 5V90 to AS/NZS 3808.

Nominal Diameter: 14.3 mm
Nominal Wall Thickness: 1.2 mm

3.5 IDENTIFICATION: Indented into Sheath at intervals not exceeding 500mm.

TYCAB 75c

METRE MARK

