


## PRODUCT SPECIFICATION

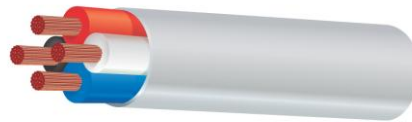

**1. PRODUCT CODE**      **SET4142**

**2. DESCRIPTION:**      4 Core 14/0.2 TCW  
V75 insulated & V75 PVC sheathed.  
Security Cable. Extra Low Voltage.  
Not for mains connection.  
Oxygen Free Copper. RoHS Compliant PVC.

### 3. CONSTRUCTION

**3.1 CONDUCTOR:**      14 strands of 0.2 mm nom. Tinned Annealed Copper to  
AS/NZS1125

drawn from Class 102 copper to AS/NZS1574.

Max. D.C. resistance at 20C:      44.8 ohms / km

**3.2 INSULATION:**      Coloured P.V.C to AS/NZS3808 type V75.

Nominal Diameter:      1.5 mm  
Nominal Wall Thickness:      0.26 mm

**3.3 LAY UP:**      4 cores twisted  
1. Black  
2. White  
3. Red  
4. Blue

**3.4 SHEATH:**      Coloured P.V.C. to AS/NZS3808 type 4V75

Nominal Diameter:      4.8 mm  
Nominal Wall Thickness:      0.50 mm

Note: Finish is typically **ROPY**

**3.5 PRINTING:**      “TYCAB NZ SECURITY SET4142 ”

at maximum 1000mm spacing.