



**TYCAB AUSTRALIA PTY LTD**

A.B.N. 43 100 305 833  
A.C.N. 100 305 833  
269 FRANKSTON-DANDENONG ROAD  
(LOCKED BAG 1413)  
DANDENONG STH VICTORIA 3164  
TELEPHONE 03 (Int. 613) 8791 0300  
FAX - ADMIN 03 (Int. 613) 9794 0031  
CUSTOMER SERVICE  
PHONE 03 (Int. 613) 8791 0333  
FAX 03 (Int. 613) 9791 8732  
[www.tycab.com.au](http://www.tycab.com.au)

**PRODUCT SPECIFICATION**

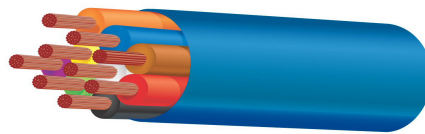


Image for illustration purposes

- 1. PRODUCT CODE** WMW2705
- 2. DESCRIPTION** 2 Core 7/.5 (1.5sqmm). P.C.W.  
UV stabilised polypropylene insulated.  
4V75 P.V.C. sheathed. TYFLO irrigation cable.  
Extra Low Voltage. Not for Mains connection.

**3. CONSTRUCTION**

- 3.1 CONDUCTOR:** 7 strands of 0.5mm Annealed Copper to AS/NZS1125 drawn from Class 102 copper to AS/NZS1574.  
Max. D.C. resistance at 20C: 13.6 ohms / km
- 3.2 INSULATION:** Coloured UV stabilised polypropylene  
Nominal Diameter: 2.35 mm  
Nominal Wall Thickness: 0.4 mm
- 3.3 LAY UP** 2 cores twisted  
1. Black  
2. Red
- 3.4 SHEATH** Coloured P.V.C. type 4V75 to AS/NZS3808.  
Nominal Diameter: 5.9 mm  
Nominal Wall Thickness: 0.6 mm