



TYCAB AUSTRALIA PTY LTD

A.B.N. 43 100 305 833
A.C.N. 100 305 833
269 FRANKSTON-DANDENONG ROAD
(LOCKED BAG 1413)
DANDENONG STH VICTORIA 3164
TELEPHONE 03 (Int. 613) 8791 0300
FAX - ADMIN 03 (Int. 613) 9794 0031
CUSTOMER SERVICE
PHONE 03 (Int. 613) 8791 0333
FAX 03 (Int. 613) 9791 8732
www.tycab.com.au

PRODUCT SPECIFICATION

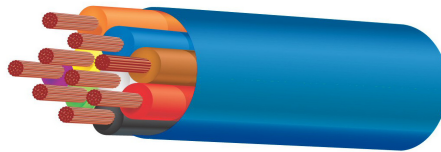


image for illustration purposes

- 1. PRODUCT CODE** WMW37067

- 2. DESCRIPTION** 3 Core 7/67 (2.5sqmm). P.C.W. UV stabilised polypropylene insulated.
4V75 P.V.C. sheathed. TYFLO irrigation cable.
Extra Low Voltage. Not for Mains connection.

- 3. CONSTRUCTION**
 - 3.1 CONDUCTOR:** 7 strands of 0.67mm Annealed Copper to AS/NZS 1125
drawn from Class 102 copper to AS/NZS 1574.

Max. D.C. resistance at 20C: 7.41 ohms / km

 - 3.2 INSULATION:** Coloured UV stabilised polypropylene
Nominal Diameter: 2.85 mm
Nominal Wall Thickness: 0.4 mm

 - 3.3 LAY UP** 3 cores twisted
 1. Black
 2. Red
 3. White

 - 3.4 SHEATH** Coloured P.V.C. type 4V75 to AS/NZS 3808.
Nominal Diameter: 7.2 mm
Nominal Wall Thickness: 0.6 mm