



TYCAB AUSTRALIA PTY LTD

A.B.N. 43 100 305 833
A.C.N. 100 305 833
269 FRANKSTON-DANDENONG ROAD
(LOCKED BAG 1413)
DANDENONG STH VICTORIA 3164
TELEPHONE 03 (Int. 613) 8791 0300
FAX - ADMIN 03 (Int. 613) 9794 0031
CUSTOMER SERVICE
PHONE 03 (Int. 613) 8791 0333
FAX 03 (Int. 613) 9791 8732
www.tycab.com.au

PRODUCT SPECIFICATION

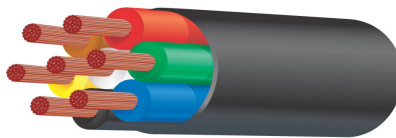


image for illustration purposes

- 1. PRODUCT CODE** ATC31603
- 2. DESCRIPTION** 3 Core 14/.32 (1.13sqmm). P.C.W. V90 PVC insulated.
5V90 PVC sheathed trailer cable.
60 Volt. Not for Mains connection.
- 3. CONSTRUCTION**
 - 3.1 CONDUCTOR:** 14 strands of 0.32mm Annealed Copper to AS1125 drawn from Class 102 copper to AS1574.
Max. D.C. resistance at 20C: 16.5 ohms / km
 - 3.2 INSULATION:** Coloured V90 PVC to AS3808.
Nominal Diameter: 2.3 mm
Nominal Wall Thickness: 0.4 mm
 - 3.3 LAY UP:** 3 Cores laid up.
1. White
2. Yellow
3. Brown
 - 3.4 SHEATH:** Coloured P.V.C. type 5V90 to AS3808.
Nominal Diameter: 5.7 mm
Nominal Wall Thickness: 0.6 mm

TYPICAL ROPY TRAILER CABLE FINISH