



TYCAB AUSTRALIA PTY LTD

A.B.N. 43 100 305 833

A.C.N. 100 305 833

269 FRANKSTON-DANDENONG ROAD
(LOCKED BAG 1413)

DANDENONG STH VICTORIA 3164

TELEPHONE 03 (Int. 613) 8791 0300

FAX - ADMIN 03 (Int. 613) 9794 0031


CUSTOMER SERVICE

PHONE 03 (Int. 613) 8791 0333

FAX 03 (Int. 613) 9791 8732

www.tycab.com.au

PRODUCT SPECIFICATION

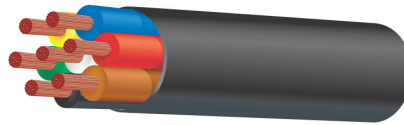

1. PRODUCT CODE: ATC7903

2. DESCRIPTION 7 Core 8/32 (0.64sqmm). P.C.W.
V90 PVC insulated & 5V90 P.V.C. sheathed Trailer cable.
60 Volt. Not for Mains GPO connection.
Oxygen Free copper. RoHS compliant PVC.

3. CONSTRUCTION

3.1 CONDUCTOR: 8 strands of 0.32mm Annealed Copper to AS/NZS 1125
drawn from Class 102 copper to AS/NZS 1574.

Max. D.C. resistance at 20C: 29.9 ohms / km

3.2 INSULATION: Coloured V90 PVC to AS/NZS 3808.

Nominal Diameter: 2.0 mm

Nominal Wall Thickness: 0.4 mm

3.3 LAY UP: 7 Cores twisted - left hand lay.

1. Red
2. Brown
3. Yellow
4. Blue
5. Black
6. Green
7. White

3.4 SHEATH: Coloured P.V.C. type 5V90 to AS/NZS 3808.

Nominal Diameter: 7.25 mm

Nominal Wall Thickness: 0.6 mm

AUSTRALIAN MADE CABLES LEADING THE WAY