



TYCAB AUSTRALIA PTY LTD

A.B.N. 43 100 305 833
A.C.N. 100 305 833
269 FRANKSTON-DANDENONG ROAD
(LOCKED BAG 1413)
DANDENONG STH VICTORIA 3164
TELEPHONE 03 (Int. 613) 8791 0300
FAX - ADMIN 03 (Int. 613) 9794 0031
CUSTOMER SERVICE
PHONE 03 (Int. 613) 8791 0333
FAX 03 (Int. 613) 9791 8732
www.tycab.com.au

PRODUCT SPECIFICATION

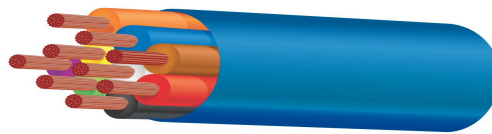


Image for illustration purposes

- 1. PRODUCT CODE** WMW5705
- 2. DESCRIPTION** 5 Core 7/.5 (1.5sqmm). P.C.W.
UV stabilised polypropylene insulated. 4V75 P.V.C. sheathed.
TYFLO irrigation cable.
Extra Low Voltage. Not for Mains connection.
- 3. CONSTRUCTION**
 - 3.1 CONDUCTOR:** 7 strands of 0.5mm Annealed Copper to AS/NZS 1125 drawn from Class 102 copper to AS/NZS 1574.
Max. D.C. resistance at 20C: 13.6 ohms / km
 - 3.2 INSULATION:** Coloured UV stabilised polypropylene
Nominal Diameter: 2.35 mm
Nominal Wall Thickness: 0.4 mm
 - 3.3 LAY UP** 5 cores twisted
 - 1. Black
 - 2. Red
 - 3. White
 - 4. Blue
 - 5. Green
 - 3.4 SHEATH** Coloured P.V.C. type 4V75 to AS/NZS 3808.
Nominal Diameter: 7.7 mm
Nominal Wall Thickness: 0.6 mm